


# NORDISK AKUSTIK A/S

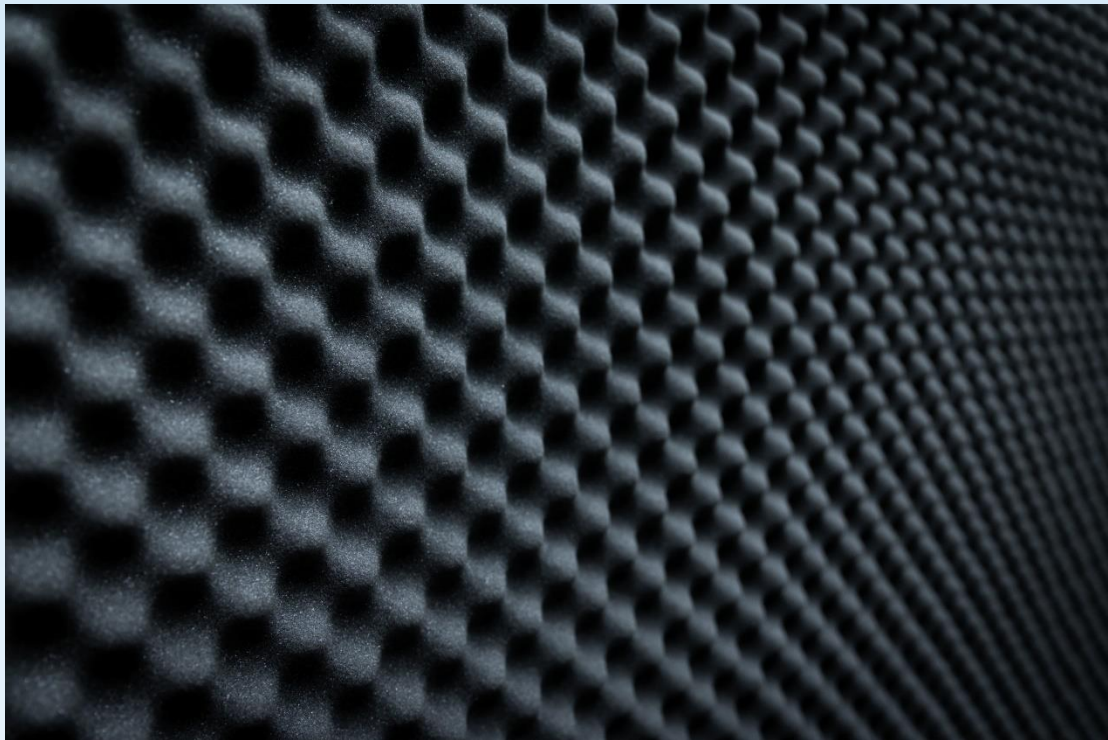

## Acoustic Sound Absorber

LA30S/LA50S

Nordisk Akustik Pyramid Absorption with selfadhesive backing, for ventilation vents and units, engine casings, compressor units and sound studios

## Nordisk Akustik – Acoustic sound absorber

### LA30S Acoustic sound absorber 15/15 mm

Thickness 30 mm, with self-adhesive backing

Size 1000 x 1500 mm

Art.no. 103020


### LA50S Acoustic sound absorber 25/25 mm

Thickness 50 mm, with self-adhesive backing

Size 1000 x 1500 mm

Art.no. 103021

Frekvens	a %			
	10mm	20mm	30mm	50mm
100	9	7	12	15
125	8	7	12	16
160	9	7	14	20
200	9	9	15	24
250	9	12	20	30
315	6	12	24	35
400	10	21	30	44
500	13	27	42	77
630	13	36	58	96
800	19	56	78	99
1000	22	70	98	94
1250	28	91	90	80
1600	40	99	92	65
2000	72	87	75	60
2500	94	67	65	84
3150	97	58	53	96

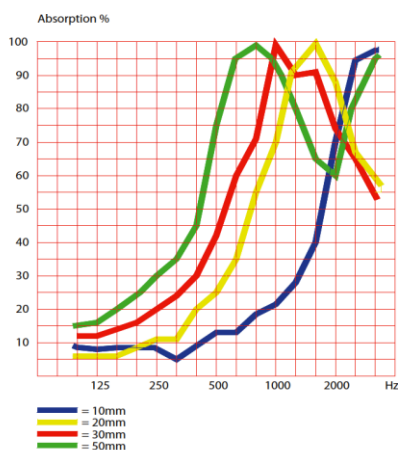


## Nordisk Akustik – Acoustic sound absorber

Heat and cold resistance: from - 30 to + 90 °C

Fire demands: Fulfill US norm FMVSS-302

Thermal conductivity: 0,036 W/m °C

Frekvens	a %		
	20mm	30mm	50mm
100	11	10	19
125	11	10	25
160	11	11	36
200	11	12	41
250	16	22	36
315	22	58	54
400	40	63	58
500	55	45	87
630	89	58	80
800	80	56	82
1000	57	80	80
1250	66	65	68
1600	73	60	57
2000	79	54	48
2500	69	50	39
3150	50	35	50

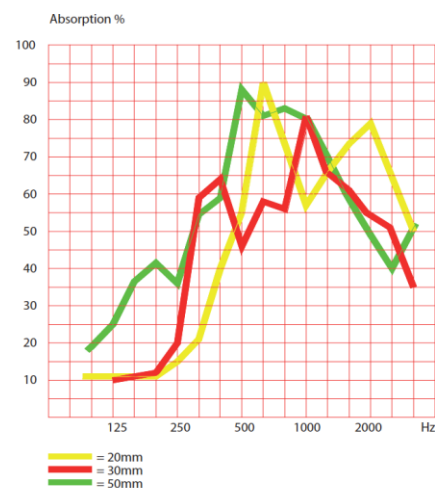

All information and instructions for use of products is based on experiments, tests and practical experience. However, they should be treated as general guidelines only. Local conditions and other used materials may influence end results. Nordisk Akustik A/S accept no responsibility for the results achieved when our products are used, as the conditions under which work is carried out is beyond our control.