


NORDISK AKUSTIK A/S

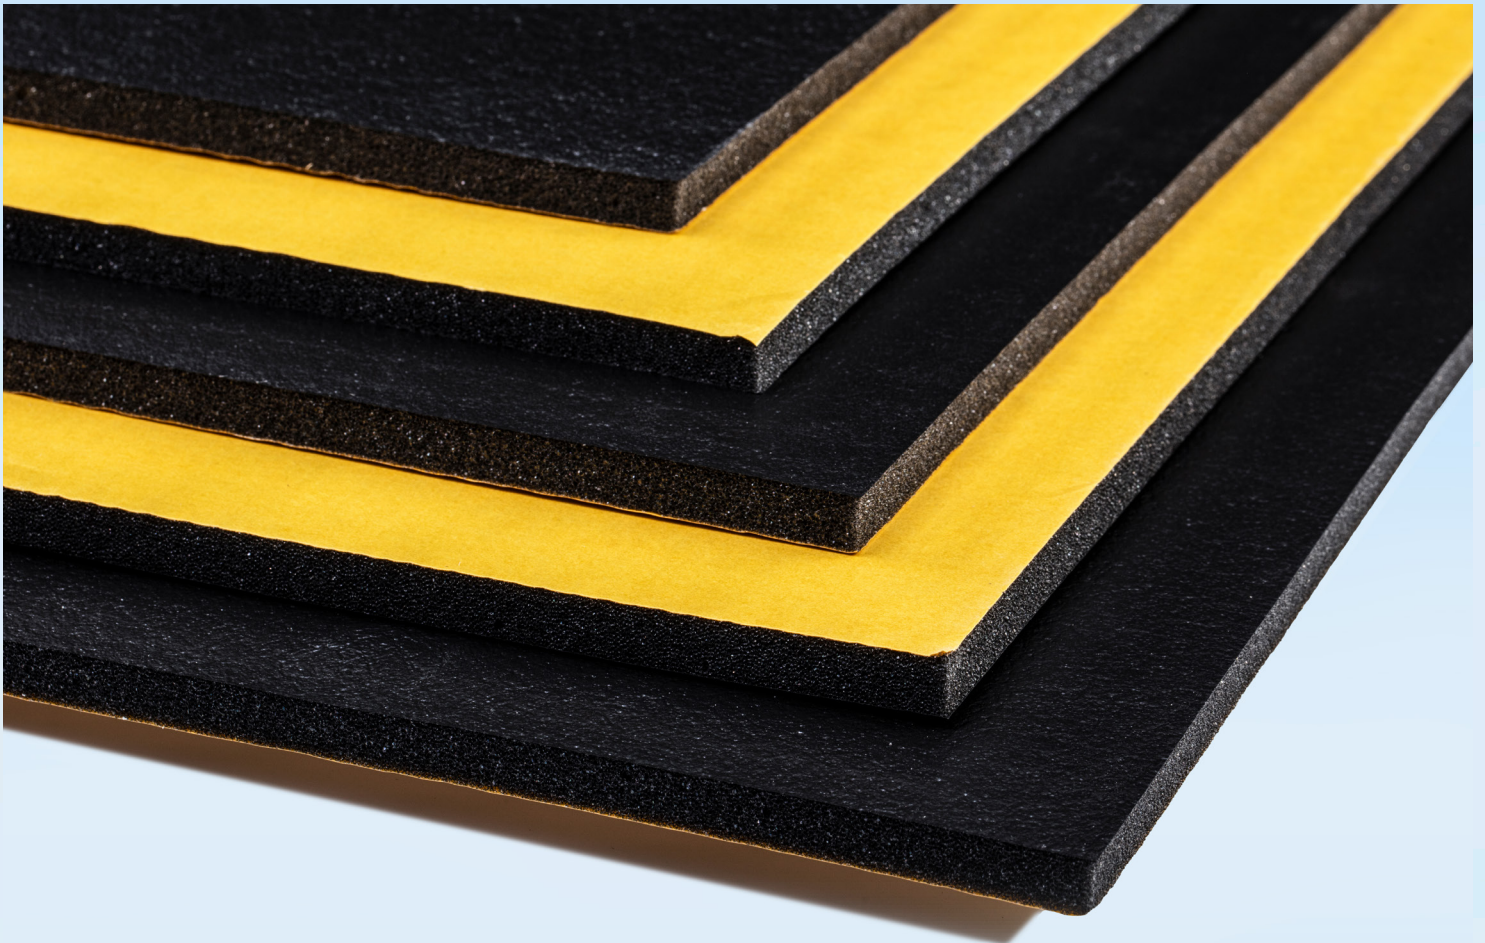

Sound insulation absorbents

LA20SU - LA30SU - LA40SU - LA50SU

LA20S - LA50S

Nordisk Akustik sound absorbents with oil and waterproof topcoat
and without topcoat for ventilation vents and units, engine casings.

Nordisk Akustik Sound insulation absorbents with topcoat

LA20SU 20 mm. absorbent, self-adhesive with black topcoat of PUR-film 0,025 mm. Oil and waterproof, size 1000 x 1500 mm. Art. no. 101510


LA30SU 30 mm. absorbent, self-adhesive with black topcoat of PUR-film 0,025 mm. Oil and waterproof, size 1000 x 1500 mm. Art. no. 101080

LA40SU 40 mm. absorbent, self-adhesive with black topcoat of PUR-film 0,025 mm. Oil and waterproof, size 1000 x 1500 mm. Art. no. 107800

LA50SU 50 mm. absorbent, self-adhesive with black topcoat of PUR-film 0,025 mm. Oil and waterproof, size 1000 x 1500 mm. Art. no. 101070

LA50SU 50 mm. absorbent, self-adhesive with black topcoat of PUR-film 0,025 mm. Oil and waterproof, size 1200 x 1500 mm. Art. no. 104440

Frekvens	a %			
	10mm	20mm	30mm	50mm
100	9	7	12	15
125	8	7	12	16
160	9	7	14	20
200	9	9	15	24
250	9	12	20	30
315	6	12	24	35
400	10	21	30	44
500	13	27	42	77
630	13	36	58	96
800	19	56	78	99
1000	22	70	98	94
1250	28	91	90	80
1600	40	99	92	65
2000	72	87	75	60
2500	94	67	65	84
3150	97	58	53	96

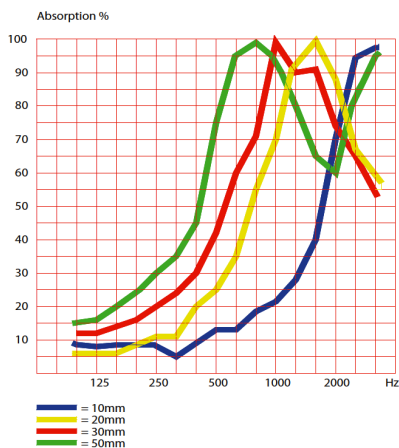

Nordisk Akustik Sound insulation absorbents without topcoat

LA20S mm. absorbent, self-adhesive without topcoat, size 1000 x 1500 mm. Art. no. 110720

LA50S 50 mm. absorbent, self-adhesive without topcoat, size 1135 x 345 mm. Art. no. 110430


LA50S mm. 50 mm. absorbent, self-adhesive without topcoat, size 1135 x 275 mm. Art. no. 110440

Heat and cold resistancy: Fra - 30°C til +90°C shortly 120°C

Fire demands: Fulfil US norm FMVSS-302

Thermal conductivity: 0,036 W/m°C

Frekvens	a %		
	20mm	30mm	50mm
100	11	10	19
125	11	10	25
160	11	11	36
200	11	12	41
250	16	22	36
315	22	58	54
400	40	63	58
500	55	45	87
630	89	58	80
800	80	56	82
1000	57	80	80
1250	66	65	68
1600	73	60	57
2000	79	54	48
2500	69	50	39
3150	50	35	50

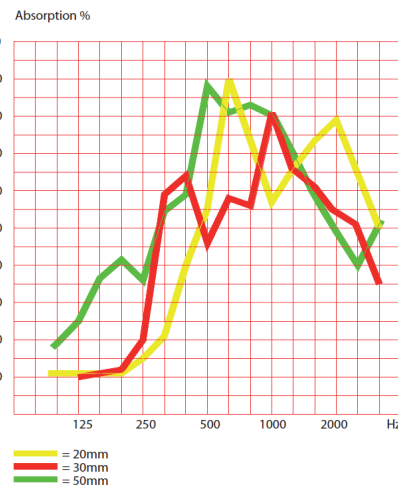

All information and instructions for use og products is based on experiments, test and practical experience. However, they should be treated as general guidelines only. Local conditions and other used materials may influence end results. Nordisk Akustik A/S accept no responsibility for the results achieved when our products are used, as the conditions under which work is carried out is beyond our control.